





# Stevens Cyclo Cross Prestige 58





### Chassis

- Frame**  Aluminium 6061TB smooth - **S12CB WPG0207**
- Front fork**  STEVENS Full Carbon Straight
- Headset**  Ritchey Pro Logic Zero Press Fit 50, 1 1/8"
- Brakes**  Oxygen Cantilever Delta, stainless







### Drivetrain

- Crankset**  ZZYZX 53/42/30
- Derailleur r**  Shimano Ultegra RD-6700 SS
- Derailleur f**  Shimano FD-CX70
- Chain**  Shimano Ultegra CN-6701
- Cassette**  Shimano CS-5700 11-34




### Wheelset


- System wheelset**  Fast Forward F4R Carbon
- Tires**  Bontrager 70x35

### Cockpit

- Handlebar**  Oxygen Scorpio Comfort Alloy 7075DB
- Stem**  Oxygen Scorpio, 31.8mm, 6°, stainless bolts
- Saddle**  Pro Hi-Comp
- Seatpost**  Pro Hi-Comp
- Shiftbrakelever**  Shimano Ultegra ST-6700
- Extra**  Adjustable Fork-Cablehanger

### Data

- Weight**  9.1 kg - 20,06 pounds (9.099 kg)
- Sizes**  50, 52, 54, 56, **58**, 60 cm
- Color(s)**  Red - White - Black

Frame weight  1.630 g (3,59 lbs)

Laden weight  115 kg \*

### Highlights 2013


**Highlight** ✦ High-performance frame with smooth welded finish

**Highlight** ✦ Shimano CX70 cyclocross crankset

**Highlight** ✦ Grifo tires with lots of grip and low rolling resistance

**Highlight** ✦ Lightweight and agile full carbon fork

**Highlight** ✦ Fork cablehanger eliminates fork-vibrations

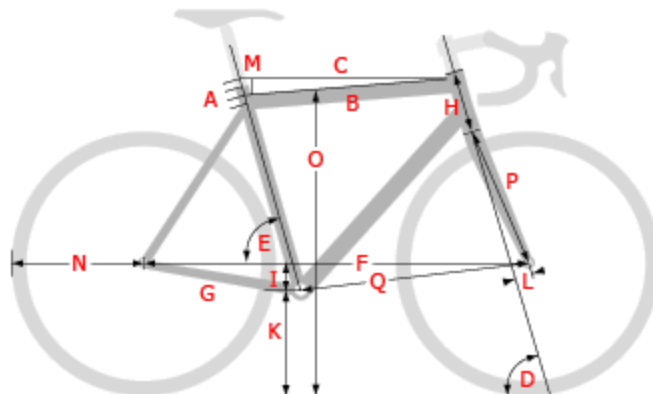

Frame height (cm)	49	52	54	56	<b>58</b>	60	Measuring mode
Seattube length	<b>A1</b> 512	550	571	597	<b>612</b>	626	nominal
Seattube length	<b>A2</b> 490	520	540	560	<b>580</b>	600	bottom bracket to top of seattube
Seattube length	<b>A3</b> 467	498	518	538	<b>558</b>	575	bottom bracket to top of top tube
Seattube length	<b>A4</b> 450	482	502	522	<b>542</b>	559	bottom bracket to center of top tube
Top tube length	<b>B</b> 500	518	528	538	<b>560</b>	576	
Top tube horizontal	<b>C</b> 512	529	540	552	<b>572</b>	588	center headtube to center seatpost/seattube
Headtube angle (°)	<b>D</b> 70.5	71	71.5	72	<b>72</b>	72	
Seattube angle (°)	<b>E</b> 75.5	74.5	74	73	<b>73</b>	73	
Wheelbase	<b>F</b> 1006	1010	1011	1007	<b>1027</b>	1043	
Chainstay length	<b>G</b> 425	425	425	425	<b>425</b>	425	
Headtube length	<b>H</b> 115	130	145	160	<b>175</b>	190	
Bottom bracket drop	<b>I</b> 62	62	65	70	<b>70</b>	70	distance of bottom bracket to hub level
Bottom bracket height	<b>K</b> 288	288	285	280	<b>280</b>	280	distance to ground
Fork rake	<b>L</b> 45	45	45	45	<b>45</b>	45	
Slope	<b>M</b> 44	50	52	56	<b>51</b>	49	top tube level distance front to rear
Wheel radius	<b>N</b> 350	350	350	350	<b>350</b>	350	incl. tires
Standover height	<b>O</b> 762	786	801	814	<b>832</b>	847	top of top tube to ground*
Fork build height	<b>P</b> 401	401	401	401	<b>401</b>	401	incl. lower headset cups
Front wheel - bottom bracket	<b>Q</b> 588	593	595	592	<b>612</b>	628	
Seatpost diameter	27.2	27.2	27.2	27.2	<b>27.2</b>	27.2	
Stem length	80	90	100	100	<b>110</b>	110	center-center

Stem angle (°)	- 6	-6	-6	-6	<b>-6</b>	-6	
Handlebar diameter	31.8	31.8	31.8	31.8	<b>31.8</b>	31.8	
Assembled spacers			23.2	10	10	5	
Handlebar width	400	400	420	420	<b>420</b>	440	center-center
Cranklength	170	170	170	172.5	<b>172.5</b>	175	
	49	52	54	56	<b>58</b>	60	

\* measured 1/3 from seattube and 2/3 from headtube